

XL-3610S

2D Barcode Scanner

Generous and classic design
High Performance Image Technology
Read 3mil high-precision barcode



1D/2D



Mobile payment



Red LED



Plug and play



32-bit



640x480 Pixels



Alipay payment



WeChat payment

Applications



Features

- Unique appearance, stylish shape, modern design
- 0.3 million global shutter camera, fast reading speed 60fps/s
- Fast reading on all 1D/2D barcode on paper and screen
- Quick decoding 3mil barcode and difficult barcodes
(blurred, wrinkled, low contrast, high density, high accuracy, long barcode)
- Compatible with Windows 7/8/10, iOS, Android, Linux system
- Suitable for retail stores, supermarkets, restaurant, pharmacy

SUNLUX IOT TECHNOLOGY (GUANGDONG) INC.

Office Add: 4F, No.7, Kehui First Street, Science Road, Guangzhou, China


Tel: +86-20-32053765 Fax: +86-20-82115390 Website: www.xl-scan.com E-mail: overseas01@xl-scan.cn



XL-3610S

Technical Parameters

Performance Parameter	
Light Source	White LED (Lighting) RED aiming light
CPU	32bit ARM
Image Sensor	CMOS
Image Size	640x480 Pixels
Scanning Speed	60 fps/s
Mobile Tolerance	1.3m/s
Mnimum Resolution	3mil
Scan Mode	Manual & Automatic
Scanning Angle	(Skew/Pitch) +/- 65°
Decoding Depth	60~360mm@(13mil UPC/EAN 100%,PCS=90%)
Decoding Capability	1D: Codabar,Code11,Code39,Code32,Interleaved 2 of 5,Industrial 2 of 5,Matrix 2 of 5,Code93,Code128,GS1-128,UPC-A, UPC-E,EAN 8,EAN 13,GS1 DataBar,RSS14,GS1 DataBar Limited,GS1 DataBar Expanded,etc. 2D: PDF417,Micro PDF417,QR Code,Micro QR,Data Matrix,Aztec Code

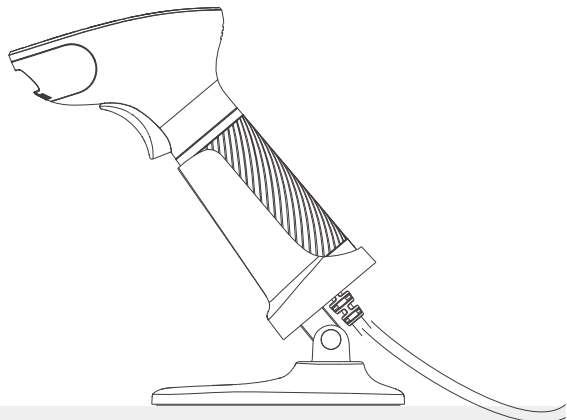

Other Parameters	
Size	L × W × H: 163×68×80(mm)
Weight	185g (Scanner)
Case Material	ABS+TPU
Input Voltage	DC 3.6V~5.5V
Working Current	142mah
Stand-by Current	42mah
Indicator	LED Indicator and Buzzer
Interface	USB-HID、USB-VCP、RS232
Cable	Straight 1.5m
Temperature (Operating)	-10℃~50℃
Humidity	5% to 95% (non-condensing)
Temperature (Storage)	-20℃~60℃
Light Levels	0~5000Lux (fluorescence), 0~100,000 Lux (sunlight)

*XL-3610S-08/23B-V.1.0.0

- ① double-screw bolt
- ② screw
- ③ bracket
- ④ bracket base
- ⑤ rubber pad

